


WRAP-AROUND LABEL SP-PN

BOPP white, opaque film for wrap-around label, high gloss surface on two sides

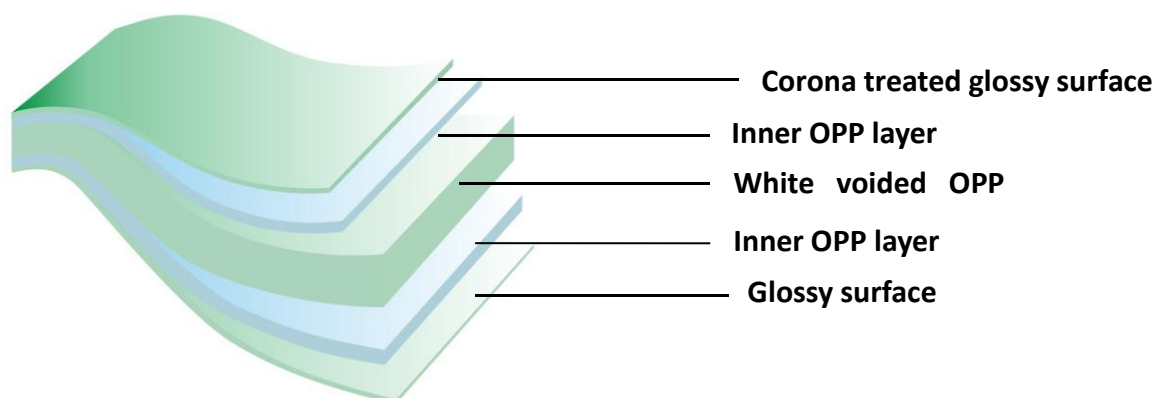

FEATURES

- Superior print receptive layer
- Excellent stiffness, whiteness and opacity
- Double side white with high gloss
- Anti-static
- Very high yield
- Excellent die-cutting
- Gravure and flexographic printing
- High mechanical strength, good dimensional stability
- Good printability and durability

STANDARD ROLL SIZE AVAILABILITY

Film	standard length (meters)		
SP-PN-65	6490	8360	9390
SP-PN-85	5000	6440	7230
SP-PN-110	3880	5000	5620
SP-PN-140	3060	3950	4430
Outside diameter for core 76mm	750mm	850mm	900mm

Note: Other roll sizes are available subject to negotiation
 Various sheet samples are available on request

TECHNICAL DATA (typical value) ASTM Standard

Application		PP Synthetic Paper for Wrap Around Label			
Product code		SP-PN			
Appearance		Glossy on both sides			
Thickness (μm)		65	85	110	140
Density (g/cm ³)		0.60			
Weight (g/m ²)		39.0	51.0	66.0	84.0
Yield (m ² /kg)		25.6	19.6	15.2	11.9
Gloss (%)	Front	109	101	102	103
	Back	105	105	99	97
Whiteness (%)	Front	71	81	83	85
	Back	69	80	82	84
Opacity (%)		85	90	91	93
Surface Tension (dyne/cm)	Front	39	39	39	39
	Back				
Roughness (μm)	Front	0.1	0.11	0.07	0.06
	Back	0.09	0.09	0.07	0.08
Tensile Strength (Mpa)	MD	48	56	58	60
	TD	105	112	113	125

* Experimental data, only for reference.

FILM STORAGE

For the storage of Lichang BoPP film, it is recommended that dry conditions at temperatures below 30° in order to minimize the deterioration of the film properties in general. The film is suitable for use up to 1 year from the date of production.

Quanzhou Lichang Plastic Co. Ltd.

www.lichangplastic.com

Manufacture: Fuxian Industry Zone, Shuitou Town, Nan'an City, Fujian Province, China,362342

Head Office Tel: +86 0595-86997773; +86 0595-86997757

Overseas Marketing department Tel: +86 0592-5023518

This figures and data provided in this datasheet are consistent with the current state of our knowledge and are intended to provide average or typical values about our products and their applications. Use of this information is limited to the specific recipient. The user is solely responsible for all determinations regarding use and we disclaim liability for any loss or damage that may occur from the use of this information.

Certified according to ISO 9001. Lichang BoPP films do not present any significant danger to health and safety in the workplace.

Edition: Aug 2017